

HSF

TECHNICAL SPECS:

Current Rating: 1.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)

Contact plating: Au over Ni

Connecting Pin: Ø0.41mm

Insulator Material: PPS+30%G.F.(UL94V-0)

Ordering Information





3515-192 XX R XX 103 X 1

No. of Pin
2-50PIN

Contact Plating
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold

Packing
A=Tray
T=Tube

Item	Pitch	Mating
Standard	1.27X2.54	3525
Alternate		

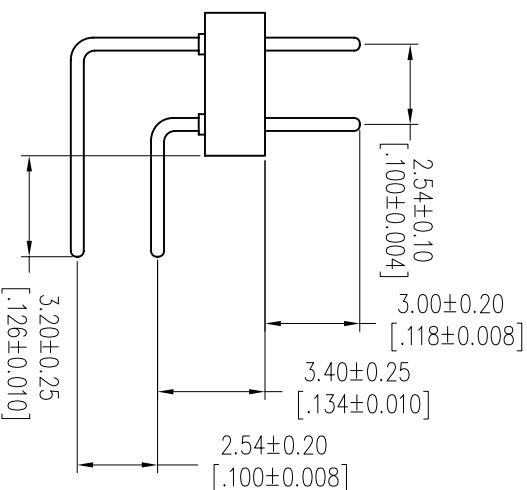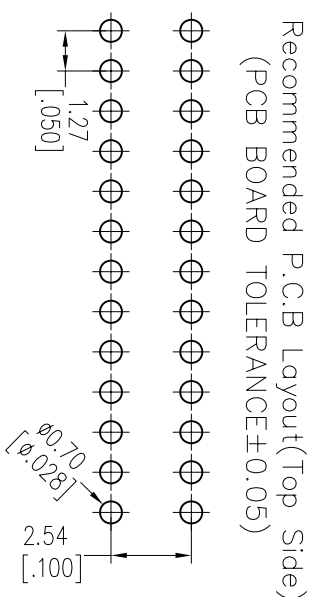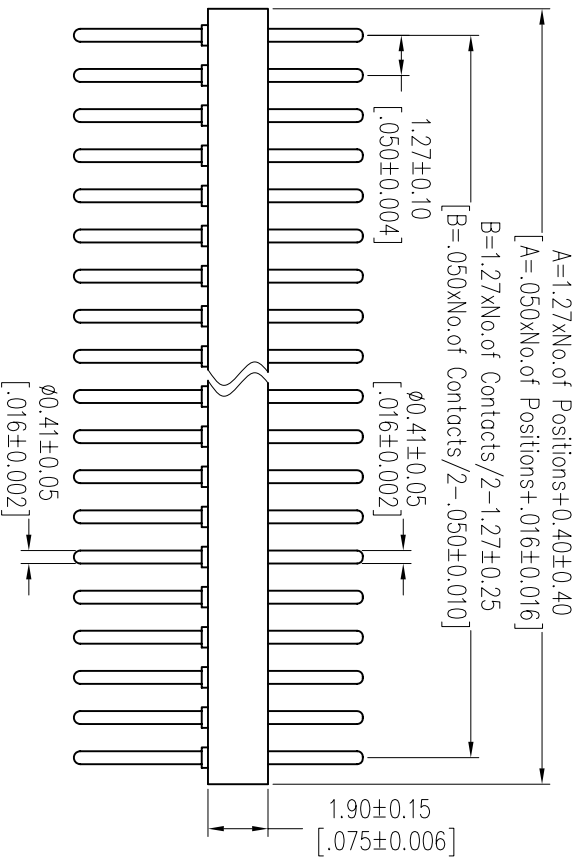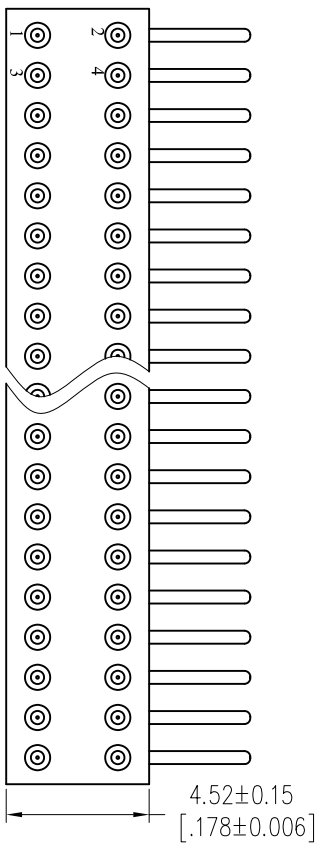

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2012/10/22	NEW		XX	JYHuang	2012/10/22	mm	A4	3515-192XXXXX103X1
				X.XX	CHECK	DATE	UNIT	SIZE	TITLE:
				X.XXX	± 0.25		mm	A4	1.27x2.54mm MACHINED PIN HEADER
				Angle	± 0.15		SHEET	1/1	DUAL ROW 90° H=1.90 L=10.3
				± 3'	APPROVE	DATE	PROJ.		Customer NO.
				DIM	TOL				